

# H2OC -718-0.5

½ Micron Glass Cellulose Pleated with Super-absorbent polymers

**APPLICATION:**

- Circuit Breaker Oil
- Hydraulic Oil
- Silicone Dielectric Oil
- Switch Gear Oil
- Tap Changer Oil
- Transformer Oil
- Turbine Oil

Crosses Velcon AC-718-1/2

**PERFORMANCE DATA:**

- Micron Rating: 0.5 NOMINAL
- Water Removal: 80 Ounces
- Collapse Pressure rating: 75 PSI
- Maximum Temperature: 250 F°
- Direction of Flow: Axial

**DIMENSIONAL DATA:**


- Outer Diameter, Top: 6.25"
- Outer Diameter, Bottom: 6.25"
- Over All Length: 18.00"
- Inner Diameter: 2.625"

**PACKAGING DATA:**

- Number per Case: 6
- Weight per Case: 33 lbs.

**FILTER CAPABILITIES**

- Removes free and emulsified water
- Removes Carbon and particulates from insulating oil

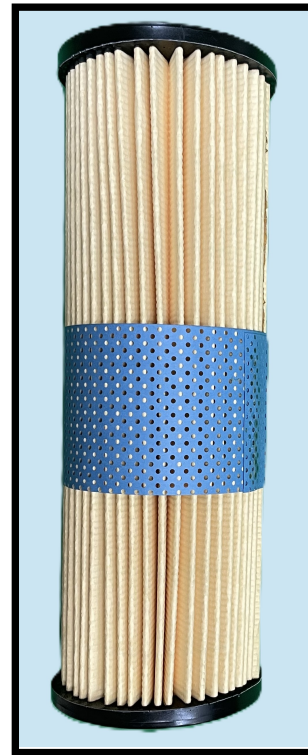

**PHYSICAL DATA:**

- Handle: Yes
- Seal Material: BUNA-N
- Center Tube: Yes-Steel
- Type of Media: Proprietary
- Filter Area: 1817 Sq In
- Outer Jacket: Yes/ Optional

**\*\*Packaged in vacuum sealed mylar bag with a desiccant packet\*\***

