



6775 Corporate Park Drive, Loudon, TN 37774 1-800-321-3895


Web: [www.filmaxinc.com](http://www.filmaxinc.com)

Email: [sales@filmaxinc.com](mailto:sales@filmaxinc.com)

## MODEL FP1105S



The Filmax FP1105S High Performance Portable Filtration System is proven to reduce operating and maintenance costs

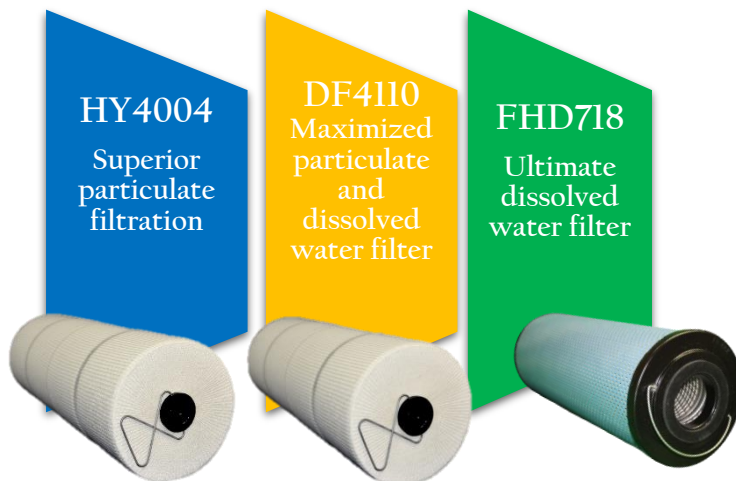

- 3/4 HP TEFC motor with thermal overload protection
- 5 GPM positive displacement gear pump with internal relief valve.
- System power switch with manual and automatic override circuit
- Plumbed with all steel and stainless steel 3/4" fittings with 1" stainless steel tubing
- One (1) polyurethane powder baked F1000 element housing.
- Wired 120 Volt, 1 phase with all electrical components mounted in a NEMA 4 enclosure.
- Motor starter switch with automatic/manual override circuit.
- Automatic high/low pressure shutdown system for unattended operation.
- 0-100 PSI glycerin filled gauge for monitoring system pressure.
- Plumbed with all brass fittings and 1/2" industrial hydraulic hose.
- 1/2" Inlet and outlet ball valves provided to isolate unit for element change.
- Fifteen (15) feet of heavy duty 14/3 power cable.
- Suction-Wye strainer to protect pump from large debris.
- Filtration capacity of 3 GPM and fluid transfer capacity of 5 GPM.
- Green run light indicator and red light shutdown indicator ( high or low pressure)

\*\* Two (2) 15 ft. 1/2" inlet and outlet hydraulic hoses with hose ends are available for an additional charge\*\*

Increasing your performance today, reducing your costs tomorrow