


FF300KSA-US

UTILITY SPECIFIC FILTER ELEMENT

**ADVANCED INSULATING OIL FILTER
SPECIFICALLY DESIGNED FOR
SUBSTATION APPLICATIONS**

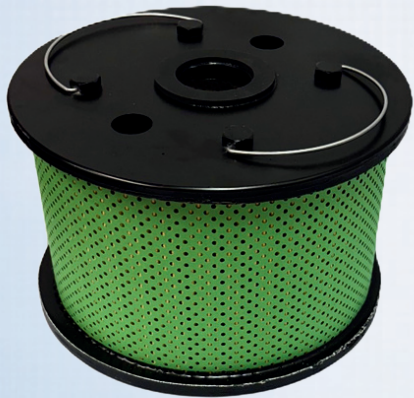

PERFORMANCE DATA

MICRON RATING: 3 MICRON
COLLAPSE PRESSURE RATING: 75 PSI
MAXIMUM TEMPERATURE: 250F
DIRECTION OF FLOW: OUTSIDE / IN

**REMOVES WATER &
CONTAMINANTS**

- ✓ Free Water
- ✓ Dissolved Water
- ✓ Particulates & Carbon

PLEASE NOTE

AS OF JANUARY 2025, THE FF300KSA
FILTER IS OBSOLETE.
FILMAX HAS DESIGNED AND PRODUCED
THE FF300KSA-US AS THE
DIRECT REPLACEMENT.



DIMENSIONAL SPECIFICATIONS

OUTER DIAMETER, TOP: 11.00"
OUTER DIAMETER, BOTTOM:
11.00"
INNER DIAMETER, TOP: 2.125"
INNER DIAMETER, BOTTOM:
2.125"
LENGTH: 7.188"

PHYSICAL SPECIFICATIONS

HANDLE: YES
SEAL MATERIAL: BUNA N
TYPE OF ADHESIVE: N/A
TYPE OF ENDCAP: MOLDED EPOXY
CENTER TUBE: PLATED STEEL
MEDIA: PROPRIETARY WATER-ABSORBENT
AREA: 1695 SQ IN
CONFIGURATION: DOE

PACKAGING SPECIFICATIONS

NUMBER PER CASE: 1
WEIGHT PER CASE: 14 LBS
**EACH FILTER IS PACKED
IN A VACUUM SEALED
MYLAR BAG WITH A
DESICCANT PACKET**

Protecting What Powers You