


FHD-1107

Advanced Absorbent Media Hydro-Dry Filter

Industry Leader in Dissolved Water & Moisture Mitigation

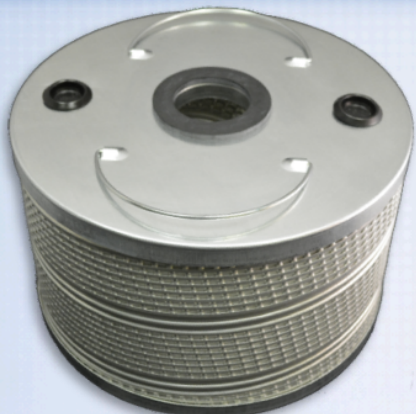

Number Per Case: 1

Weight Per Case: 22 lbs

****Each filter is packed in a vacuum sealed mylar bag with a desiccant packet****

Performance Data

- Viscosity
100-500 SUS
- Collapse Pressure Rating
75 PSI
- Maximum Temperature
275 F
- Direction of Flow
Outside-In
- Water Removal
1300 ml

Applications

- Hydraulic
- Compressor
- Insulating
- Turbine
- Transmission

Direct Cross for **SD-1107** and Other OEM Elements

Replaces Parker Velcon®, Pall®, Kaydon®, Hy-Pro®, and more, delivering equal or improved performance.

Physical Data

- Handle: Plated Steel
- Seal Material: Buna-N
- Type of Adhesive: Epoxy
- Type of endcap: Plated Steel

Dimensional Data

- Outer Diameter 11"
- Inner Diameter 2 1/8"
- Length 7 1/2"

****Please Note****

Using differential pressure to measure the performance of the Filmmax FHD filter will not provide optimal results, however it can be confirmed by several methods. The amount of dissolved water removed by the filters can be assessed utilizing in-line moisture sensors such as the Doble Domino, by means of Dissolved Gas Analysis (DGA), or by using a Karl Fischer test.

Protecting What Powers You

www.filmaxllc.com

PH 800-321-3895

All OEM names, trademarks, and part numbers are used for reference purposes only. Filmmax LLC is not affiliated with the original equipment manufacturers.