


HY-4004

Industry Leader in Carbon & Free Water Removal Filtration

Depth Wound Cellulose Media Filter

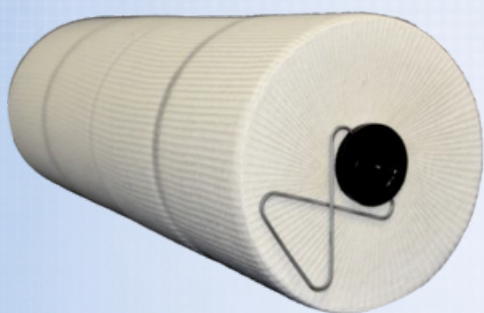

Applications

- Hydraulic
- Compressor
- Oil based coolants
- Insulating
- Turbine
- Transmission Oil

Dimensional Data

- Outer Diameter
7.25"
- Inner Diameter
0.915"
- Length
19 3/8"

Performance Data

- Viscosity
100-500 SUS
- Collapse Pressure Rating
75 PSI
- Maximum Temperature
275 F
- Direction of Flow
Axial
- Water Removal
1 Gallon
- Micron Rating
3 Absolute
- Micron Rating
.5 Nominal
- Beta Rating
 $\beta\beta 3=200$

Physical Data

- Handle
Metal
- Seal Material
BUNA-N
- Type of Adhesive
N/A
- Type of Endcap
Nylon
- Type of Media
Cellulose
- Filter Area
3000 Sq. Ft.

Number per case: 4 Filters

Weight Per Case: 32 LBS

****Each filter is packed in a vacuum sealed mylar bag with a desiccant packet****

Protecting What Powers You